


Eclipse - Sconce

MAY 2024

INSTALLATION INSTRUCTIONS - LOW VOLTAGE

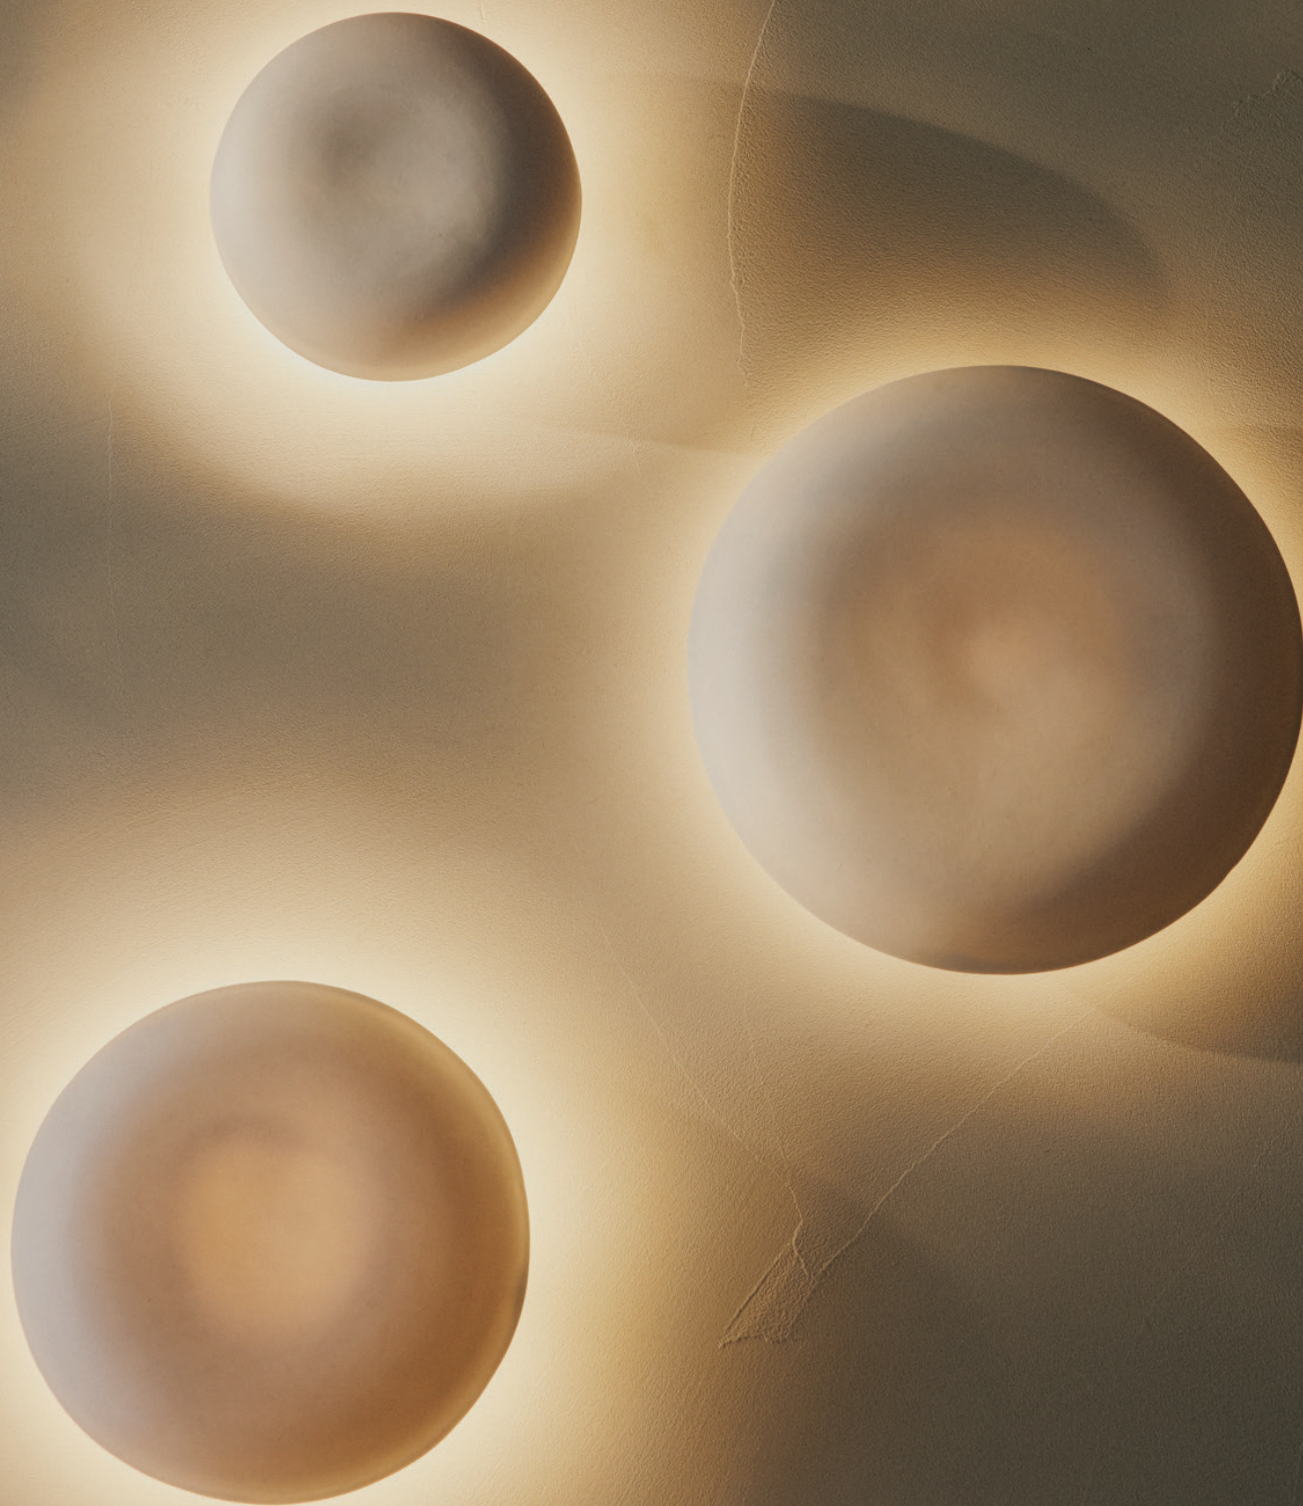

StudioEnti

Eclipse- Sconce

MAY 2024

INSTALLATION INSTRUCTIONS - LOW VOLTAGE

Product	ECLIPSE, SCONCE
Product Code	ENTI-ECL-/S/M/L
Input Voltage	24V~ DC
Wattage	*Sml 3.6w Med 5w Lge 5w
Wattage White	*Sml 3.6w Med 5w Lge 9.4w
Driver	NOT INCLUDED 24V DC LED
Colour Temp	3000K
Lumens	Sml 115 Med 153 Lge 250
Beam Angle	120 degrees
Dimming	0-1/10V, DALI, DMX,RF
Wiring	Parallel
Warranty	2 years
	*wattage variations may occur on a one-off basis please confirm with studio Enti if required

DANGER: Lights must be installed by a qualified electrician. Electric shock risk.

- Turn off electrical power before beginning installation and use caution when installing.
- Please do not modify or adjust any fixture in a way that is not clearly stated or intended.
- Always ensure the power is off and the luminaire has cooled down before performing any maintenance to the fitting.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.
- To avoid electric shock, do not touch item if your hands are wet.
- To clean, wipe with a soft damp cloth. Do not soak or immerse the luminaire in water or other liquids.
- Do not use if any breakage or distortion is found on the wiring or socket, or if the products have been wet.
- STUDIO ENTI is not responsible for any damages caused by not following the provided instructions.

This luminaire is intended for mounting to a wall:

- Carefully check luminaire and wiring for damage before use. Do not use the fixture if it is damaged.
- Ensure that local voltage and frequency match the marking.
- For indoor use only.
- Do not disassemble the structure of the fixture.
- Do not leave children alone with the product.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer to avoid hazard.
- Please use reliable suspending and fixing devices to avoid danger.
- This is a Class I device and must be connected to a protective grounding.
- Terminal block and connection box is not included.
- Only qualified personnel may install this device. Please observe national installation regulations.

StudioEnti

Address	1615 Botany Rd, Botany, NSW
Email	info@studioenti.com.au
Phone	0417 111 688
Web	www.studioenti.com.au

Eclipse - Sconce

MAY 2024

INSTALLATION INSTRUCTIONS - LOW VOLTAGE

PLEASE CAREFULLY READ INSTRUCTIONS BEFORE INSTALLATION.

INSTRUCTIONS


1. Drill max 30mm hole in Wall using holesaw to allow for cable termination. Use Wall Anchors (not provided) to fix the Universal Mounting Bracket to Wall . NOTE: Ensure Universal Mounting Bracket is installed level.
2. Secure the O-ring over the rim of the universal mounting bracket and push all the way until against the wall.
3. Connect Electrical cables from fitting to the sourced 24v driver and make the wire connection to the 240V power supply as per electrical plan.
4. Install the Canopy onto the wall over the Universal Mounting Bracket, the O-ring with fit snugly between the bracket and the canopy. Then secure the canopy in place with screws supplied.

**TWO PEOPLE ARE
REQUIRED FOR
INSTALLATION**



FRAGILE FINISHES

**PLEASE WEAR GLOVES
DURING INSTALLATION**

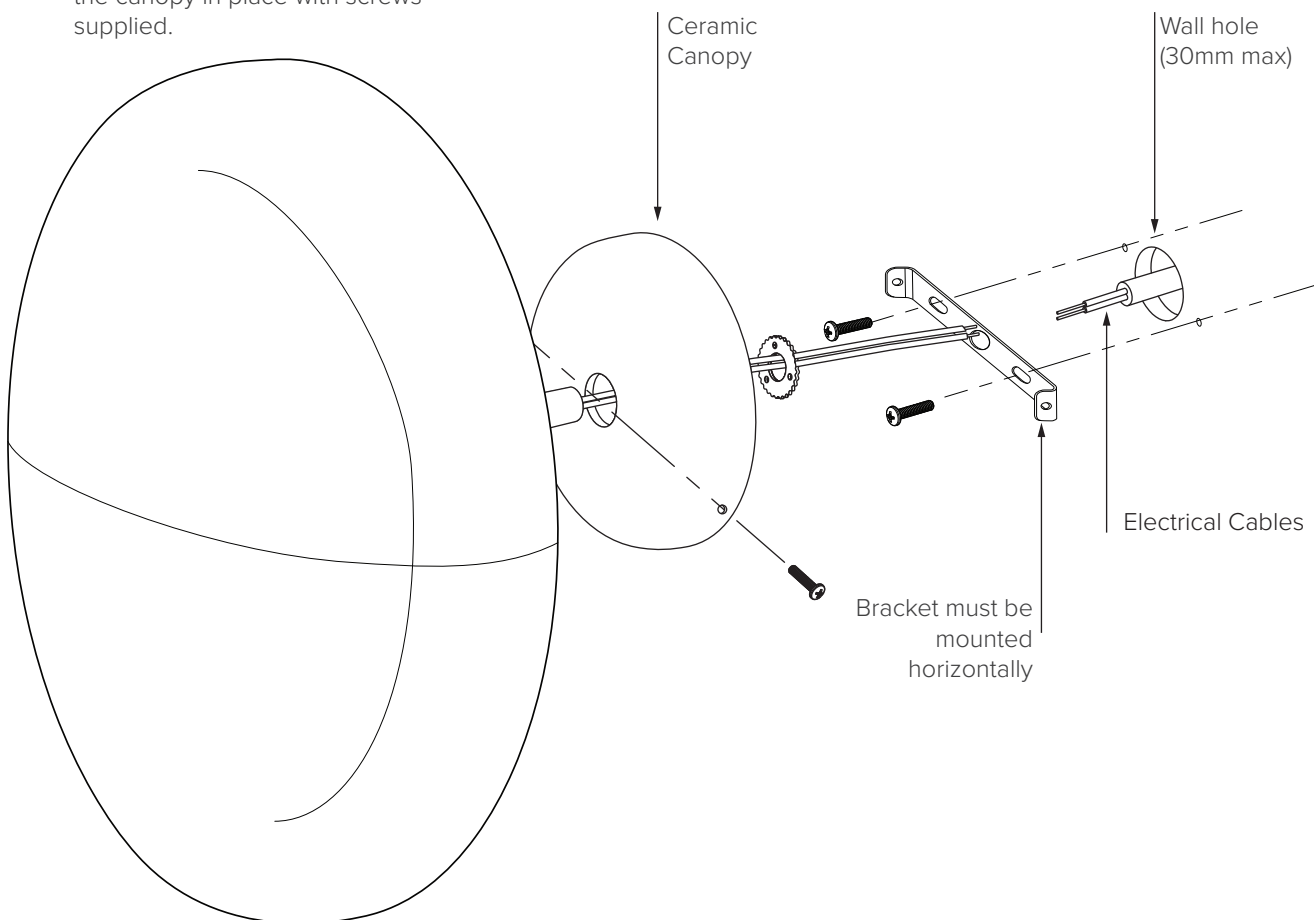

StudioEnti

Address	1615 Botany Rd, Botany, NSW
Email	info@studioenti.com.au
Phone	0417 111 688
Web	www.studioenti.com.au